

Reliable and quick

New
design



Flexvent Automatic air vent

Features and benefits:

- Easy to install
- Reliable and fast
- Captive cap with open/close function and leak prevention
- Substantial gap between water and closing: reduced chance of contamination
- Extensive product range

Flexvent: Improved design

Under the name 'Flexvent', Flamco offers a comprehensive range of automatic floating air vents. Flexvent air vents have proven themselves in the market for decades. Flamco has improved the Flexvent automatic floating air vent even further in terms of both the design and execution.

The Flexvent floating air vent consists of a closed brass housing and an interior made entirely of plastic. The water level lifts the float and keeps the air valve mechanism closed. When air collects in the vent housing, the water level drops, lowering the float and opening the vent valve.

The collected air is vented, allowing the water level to rise and the air valve to close again. This process will keep repeating as long as air enters the Vent housing during normal operation.


Advantages and features

NEW: Captive cap with open/close function and nuisance leak prevention

Robust design (1-piece brass body)

Suitable for closed central heating and cooling installations with glycol solutions of up to 50%

Easy assembly and disassembly thanks to pre-assembled brass valve sleeve

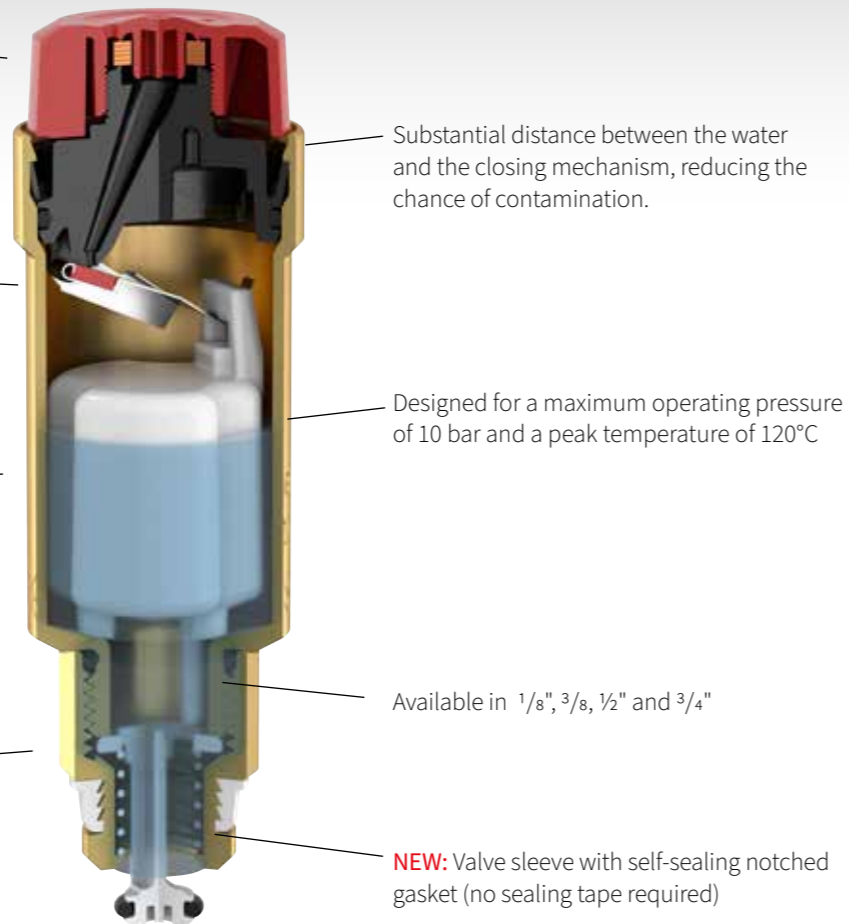

Extensive product range



| Connection | Valve sleeve | Bubble breaker | Colour | Part No. |
|-----------------|--------------|----------------|---------------|----------|
| R 1/8" | no | yes | brass | 27775 |
| G 3/8" | yes | no | brass | 27750 |
| R 1/8" / R 3/8" | yes | no | brass | 27780 |
| G 1/2" | yes | no | brass | 27740 |
| G 1/2" | no | yes | white | 27743 |
| G 1/2" | yes | no | nickel-plated | 27742 |
| G 3/4" | yes | no | brass | 27735 |

Other models

Flexvent H

With a 1/2" side connection allowing direct installation in one of the radiator plugs. As this model is usually installed in plain sight, there are two models: nickel-plated and white.



| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|---------------|----------|
| R 1/2" | no | Nickel-plated | 27710 |
| R 1/2" | no | white | 27711 |

Flexvent Super

The conical cap maximises the distance between the water level and vent valve. The vent valve is integrated in the cap, so the float mechanism cannot be damaged from the outside.



| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|--------|----------|
| G 1/2" F | no | brass | 28520 |

Flexvent Max

Similar in appearance to the Flexvent Super 1/2" but with a 3/4" connection and suitable for pressures of up to 25 bar.



| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|--------|----------|
| Rp 3/4" | no | brass | 28550 |

Flexvent Solar

Manually operated air vent for solar installations with or without glycol addition. Suitable for a supply temperature of -10 to 200°C and a maximum operating pressure of 10 bar.



| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|---------------|----------|
| R 3/8" | no | Nickel-plated | 27785 |

Flexvent Top Solar

This model includes a ball valve and is suitable for a supply temperature of -30 to 180°C and a maximum operating pressure of 10 bar.



| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|--------|----------|
| G 3/8" M | no | brass | 28505 |



Flexvent Top

This automatic floating air vent works on the same principle but has a larger venting capacity.



| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|--------|----------|
| Rp 1/2" | no | brass | 28515 |
| R 3/8" | yes | white | 28510 |

Flexvent Pro

The Flexvent Pro contains a filter that breaks down large air bubbles into smaller ones. They can then find their way out more easily.




| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|--------|----------|
| Rp 1/2" | no | brass | 28519 |

Flexvent Top Aqua

This model is suitable for potable water installations with a water hardness of CaCO₃ < 180 mg/l. Features ACS approval (KIWA approval on request).



| Connection | Valve sleeve | Colour | Part No. |
|------------|--------------|--------|----------|
| Rp 1/2" | no | brass | 28508 |

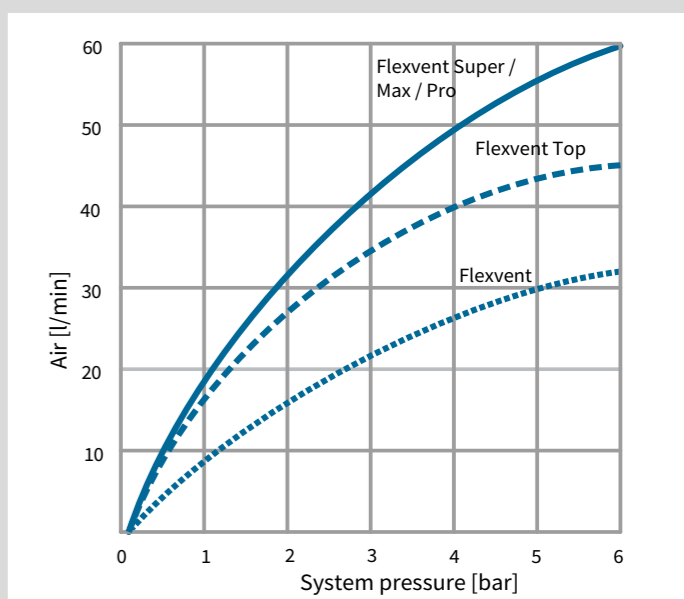

Even more Flamco products for heating and cooling

Flamco offers a wide range of products for heating, cooling and solar installations. From expansion vessels, safety valves, air and dirt separators to ball valves and handy installation aids such as the

FlexConsole and T-plus. Our products are highly durable, energy-efficient and have a long service life.



*Flexcon Premium
Expansion vessels*



*Airix Expansion vessels for
potable water*



*Flexcon Solar
Expansion vessels*



*Flexcon PA AutoFill
Pressure maintenance assistant*



*Prescor Safety valves
(Heating)*



*Prescor Safety valves
(Potable water)*



*Prescor Solar
Safety valves*



*Prescor IC Fill
Safety Group*



*Simplex KFE Ball Valves
(Heating)*



*Simplex KFE Ball Valves
(Potable water)*



*Simplex KFE Ball Valves
(Solar)*



*XStream
Air and Dirt separators*

Flexvent
Reliable and quick

United Kingdom
Aalberts hydronic flow control
Washway Lane
St Helens, Merseyside
WA10 6PB

T +44 1744 744 744
E uk.info@aalberts-hfc.com

United Arab Emirates
Aalberts hydronic flow control
Silicon Oasis D206 HQ
PO Box 341479
Dubai

T +971 4 881 95 40
E ae.info@aalberts-hfc.com

The Netherlands (Export)
Aalberts hydronic flow control
Fort Blauwkapel 1
1358 AD Almere

T +31 (0)36 526 2300
E export.info@aalberts-hfc.com